


SCHEMATIC DIAGRAM

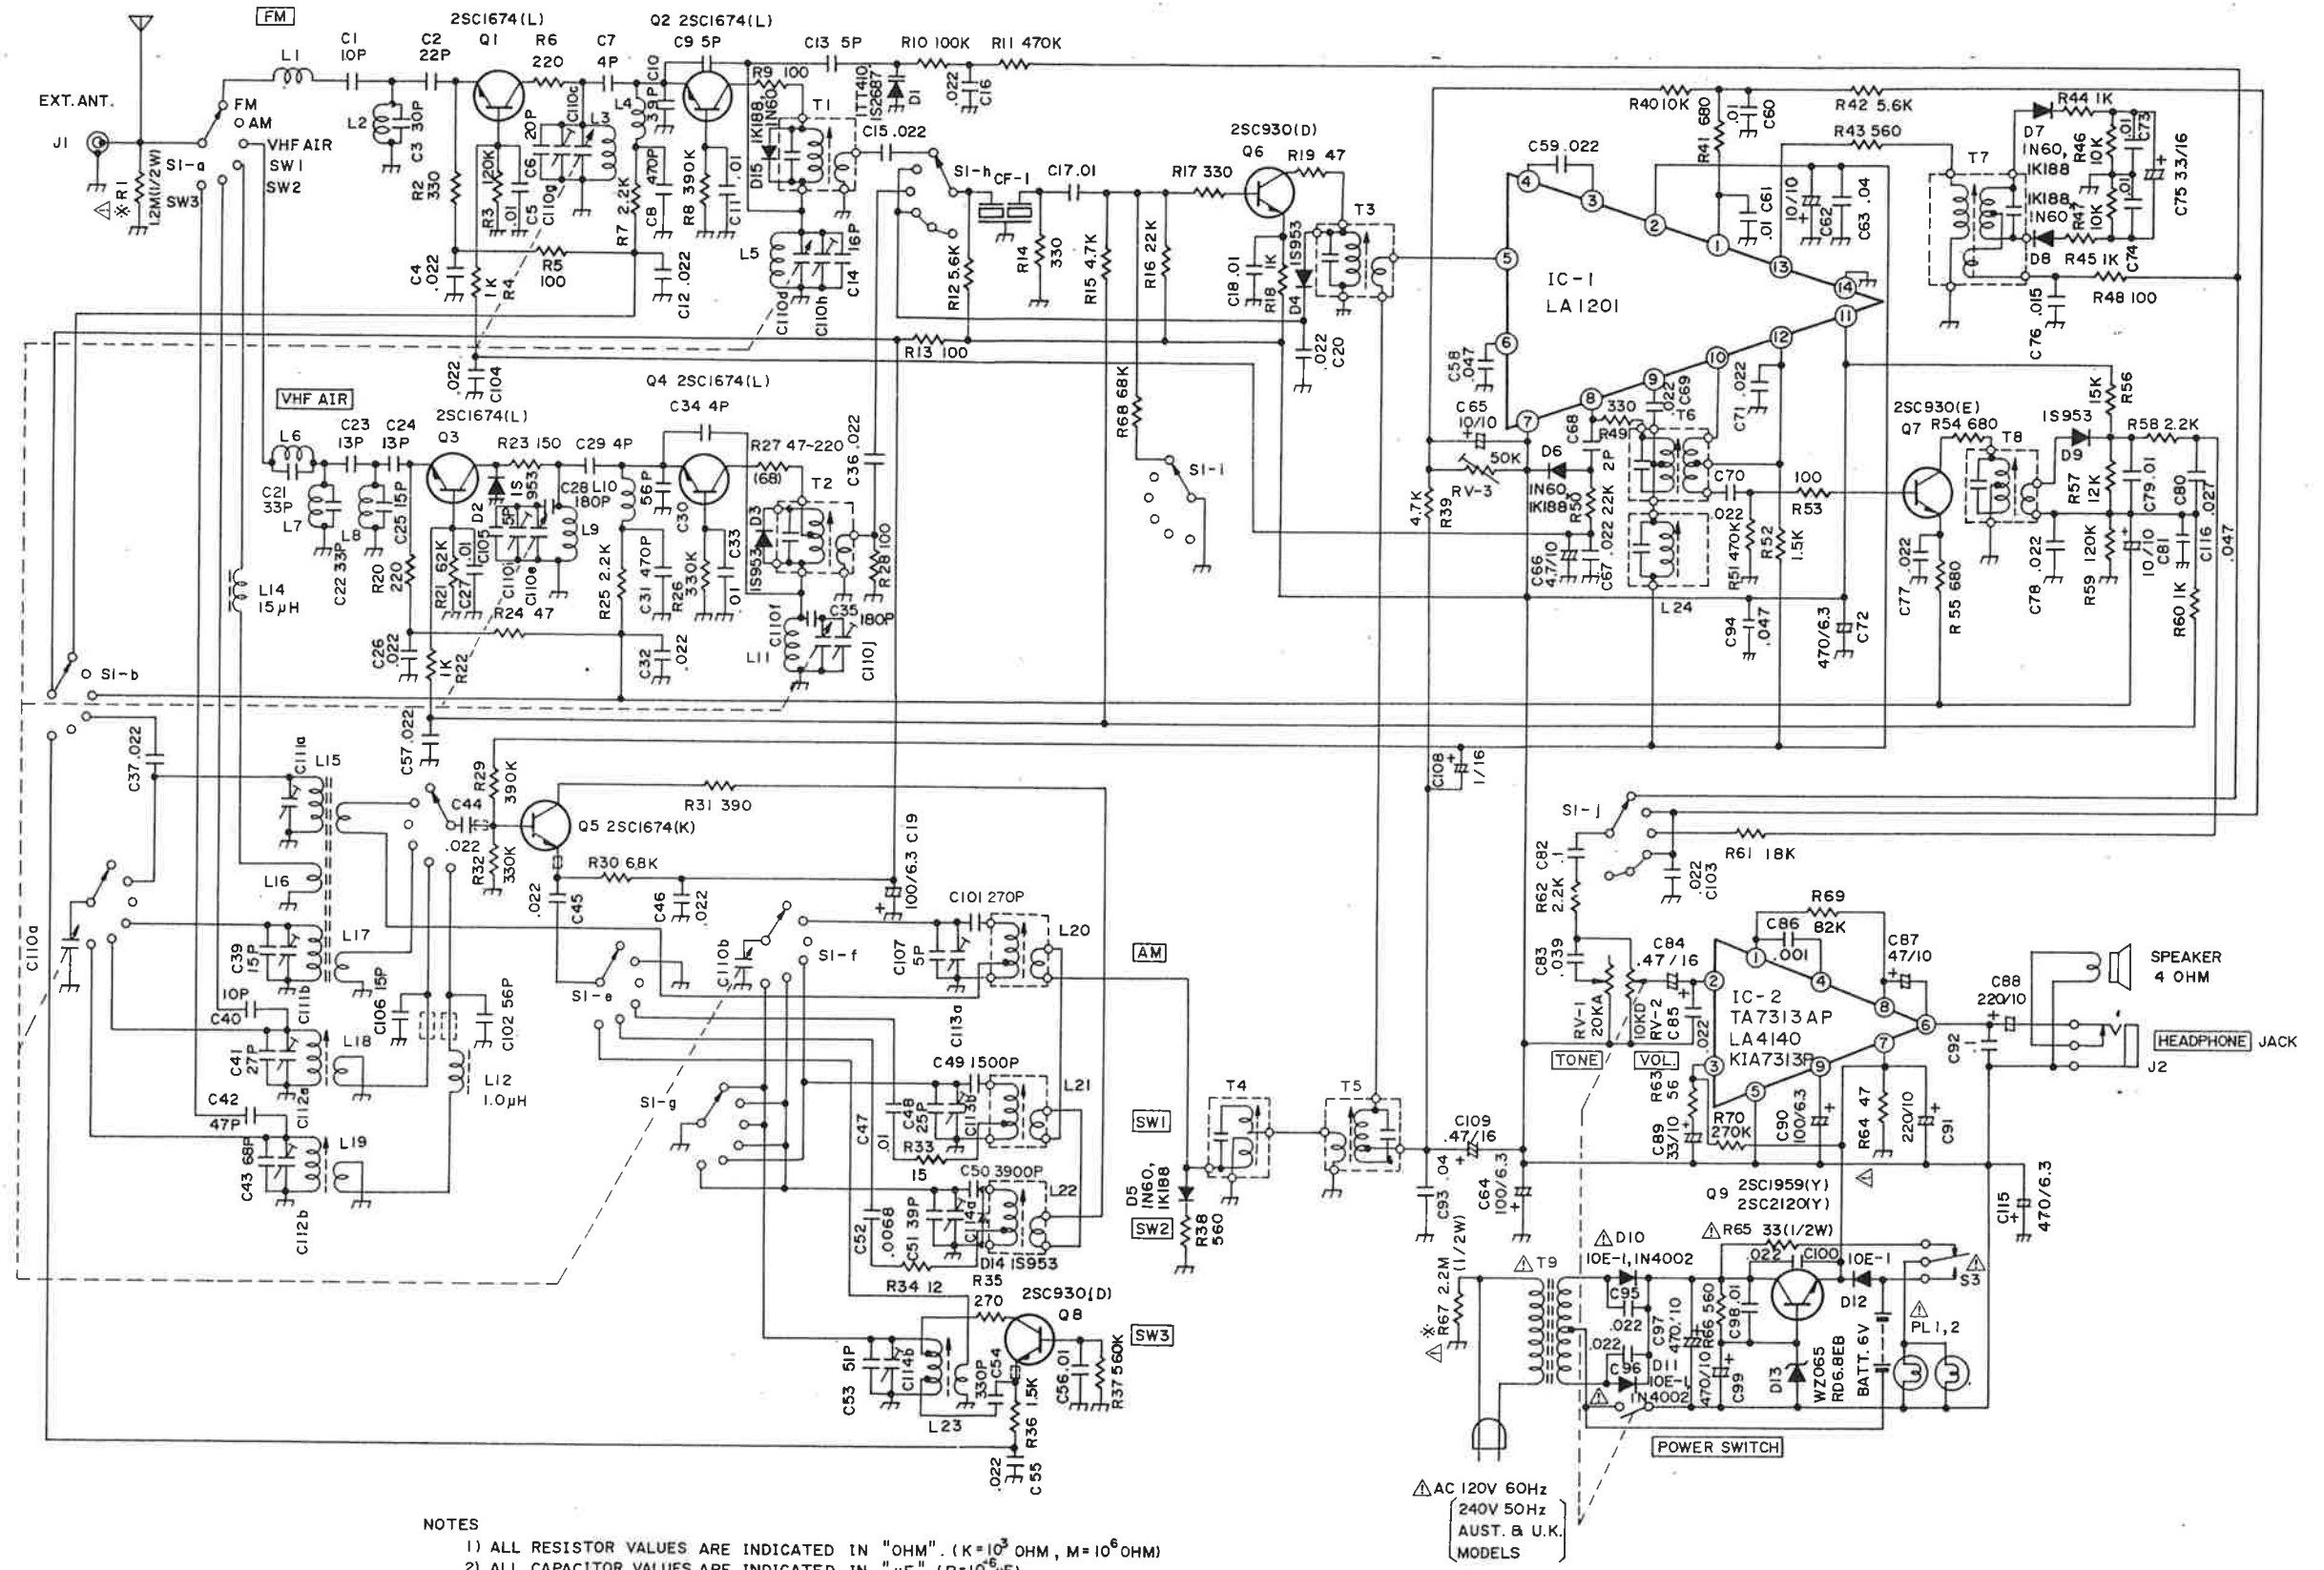

NOTES

- 1) ALL RESISTOR VALUES ARE INDICATED IN "OHM". (K=10³ OHM, M=10⁶ OHM)
- 2) ALL CAPACITOR VALUES ARE INDICATED IN "uF". (P=10⁶ uF)
- 3) * FOR AUST. & U.K. MODELS, R1 AND R79 ARE NOT USED.
- 4) MARKED Δ PARTS ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.

Δ AC 120V 60Hz
 Δ 240V 50Hz
 AUST. & U.K. MODELS