



RE3000

QUICK START GUIDE

Setting Your Preferences

Backlight: Select Display light preferences. Options include:

- **On When Receive:** Display illuminates for 10 seconds when receiving
- **On When Key Pressed:** Display illuminates for 2 seconds when key is pressed
- **Off:** No Display illumination
- **Always On:** Display is continually illuminated

Squelch:

Squelch filters out unwanted noise. **Squelch** operates as a gate to reduce noisy transmissions. If the transmission is strong, the gate will open & the transmission will be heard. If the transmissions is weak or mostly static, the gate will remain closed & the transmission will not be heard. The User can set **Squelch** level to LOW, MID or SENSITIVITY.

Favorite Scan: Set FAVORITE SCAN to ON or OFF

- **Set To On:** Favorite Drivers will be scanned more frequently on scanning mode and they can be scanned on listening mode.
- **Set To Off:** Turn Favorite Drivers to OFF

Programming Your RE3000

Programming: Use this menu option to automatically or manually program, read and delete channels. Channels can be programmed into the radio by using the methods listed below.

Over The Air:

Before performing this function, scanner and transmitter must be set to the same frequency. Scanner is then ready to receive **OVER THE AIR** data from the transmitter, downloading it and automatically programming the scanner. This is the preferred and fastest method of updating the scanner with the latest track/driver frequencies, names, codes and channel numbers. Select **DONE** when the display shows **COMPLETE**.

Keypad Entry:

Use the Numeric Key Pad to enter the following information:

Channel Number: Enter car number.

Frequency: Enter a valid frequency by using the Up or Down Navigation Pad. (450-469.9875)

CTCSS/DCS Code: This code is essential for monitoring track/driver channels. CTCSS and DCS Codes are sub-audio signaling formats designed to prevent interference from other broadcasting stations sharing the same frequency. When using CTCSS or DCS codes the scanner will only respond to transmissions carrying the tone. Therefore you only hear the race team's transmissions. Up/Down/Left/Right (Navigation Pad) 4-Way Key can adjust CTCSS/DCS code. Left Key can turn CTCSS Code off and UP Key can increase CTCSS Code number. Right Key can set DCS Code to first one and UP Key can increase DCS Code number.

Alpha Label: Used to name the channel. This field can be a letter or number. Use the Numeric Key Pad to enter letter/number in the display. Using Navigation Pad to edit channel's name, UP or DOWN Key can switch between ABC, abc, or 123, LEFT or RIGHT Key can move cursor, LEFT Key can delete entry, and NEXT Key can jump to next channel for programming.

RE3000 Scanner Controls/Features

- | | | |
|----------------------------|-------------------------|-------------------------------|
| 1. Speaker | 6. LCD Display | 11. Alpha Numeric Keypad |
| 2. BNC Antenna | 7. Left/Right Soft Keys | 12. Car Key |
| 3. On/Off & Volume Control | 8. Up/Down Keys | 13. Left/Previous Channel Key |
| 4. Headset Jack | 9. Right/Menu Key | 14. Volume Set/Function Key |
| 5. USB Connector | 10. Scan Key | |



RE3000 Keypad: Command Keys




- 1 MENU (Menu Key):** Displays scanners Main Menu or Secondary Menu
- 2 Left Soft Key:** Displays left display command/prompt
- 3 Right Soft Key:** Displays right display command/prompt
- 4 PREV CH (Previous Channel Key):** Selects last tuned channel
- 5 CAR (Car Key):** Stops automatic scanning, allows user entry of channel #
- 6 SCAN (Scan Key):** Begins scanning the selected series channel list

RE3000 QUICK START GUIDE



LCD Display

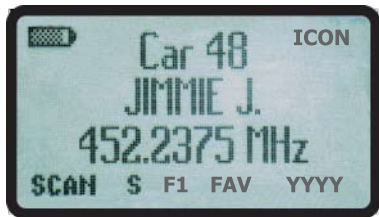

- Battery Capacity Indicator
- Car Number
- With REPLAY FUNCTION active, symbol is tape or speaker
- Driver Name
- Frequency driver uses
- Left Soft Key Function: Depending on the situation screen shows - SERIES, SCAN, SELECT/DESELECT or PLAY
- Scan List Mark: Shows on display if channel is selected in the scan list.
- Favorite Channel Mark: This symbol indicates the channel that is assigned to a favorite Driver
- Favorite Channel Scan Mark: This symbol indicates when Favorite Driver Scan is active.
- Right Soft Key Function: Depending on the situation screen shows - MANUAL, DONE or STOP

How to operate your RE3000

Getting start and select one of the Series that you desired.

- a. Turn the power switch on, then scanner's display will illuminate.
- b. Press and hold the "SQ" button to adjust the volume to a safe and comfortable level before connecting the headset
- c. Press the Left Soft Key/ Right (MENU) Key and select Race Series. Note! Series channels must be programmed and will need to be updated for each race.
- d. Use the 4-Ways Key to scroll through series options, the series and start scanning all programmed/selected channels within that series.

To Edit Scan List

- a. Select Scan List from the main menu. The channels for the selected series will be displayed.
- b. Scroll through driver channels and press the Left Soft Key (SELECT/DESELECT) to select /deselect channels on the scan. There is an arrow mark beside the name to identify that the channel has been selected on the Scan List.
- c. Press the Right Soft Key to return to Main Menu .
- d. When inside Scan List, press MENU Key to enter Secondary Pop-up Menu.
- e. Scroll up and down to Highlight Desired function, press Right (MENU) Key to select.

To Edit Favorite Channel

There are two ways to edit user's favorite driver, one is from Main Menu, and another is on scan mode.

- a. From MAIN MENU:
 - Select Series (series0, series1, series2 or series3).
 - Select Favorite Channel from the Main Menu. The programmed channels for the selected series will be displayed.
 - Scroll through driver channels and press Left Soft Key (SELECT) to assign a priority to the selected channel.
 - Pressing the Left Soft Key repeatedly will scroll through the priority selection (3,2,1).
 - Press Right Soft Key (DONE) when the priority is assigned.
- b. To memorize favorite driver on scan mode
 - Push CAR Key and enter the desired car number, then push CAR or Enter key to make scanner stand on the desired channel. Push and hold FUNC and Numeric Key (1,2,or 3) for 3 seconds to store favorite driver in that key (1,2,or 3)The previous record will be overwritten after above procedure is performed.

Two-Step Key (Shortcut Key)

The keys with red letter have other function when they work with FUNC (Function) button.

- FUNC + FAV:** The channel that scanner stands on will be memorized to favorite driver when FUNC Key pressed and held first, then presses FAV (1,2,or 3) for three seconds. Scanner will go to Favorite Driver directly if FUNC and FAV Keys are pressed.
- FUNC + Replay:** Scanner turns REPLAY function from On to Off or from Off to On if both FUN and Replay Keys are pressed.
- FUNC + F.SC:** Scanner turns Favorite Channel Scan function from On to Off or from Off to On if FUN and F.SC Keys are pressed.

Main Menu

The RE3000 scanner has five user editable choices in the main menu - **Race Series, Scan List, Favorite Channel, My Preferences, Programming.**

- **Race Series:** Four series of 110 channels each, there are 110 channels per series 00-09, 0, 1-99. Car Numbers correspond with the channel number in the selected series.
- **Scan List:** Operating with two soft keys and 4-Ways Key can select/deselect channels into/from Channel List.
- **Favorite Channel:** Operating with two soft keys and 4-Ways Key can select/deselect channels into/from Favorite Driver List.
- **My Preferences:** There are 4 items Backlight, Squelch, Favorite Scan, and Replay for setting.
 - Backlight: Operating with two soft keys and 4-Ways Key can set the backlight to "On When Receive", "On When Key Pressed", "Always On", or "Off".
 - Squelch: Operating with two soft keys and 4-Ways Key can set squelch level to "Low", "Mid", or "Sensitive".
 - Favorite Scan: Operating with two soft keys and 4-Ways Key can set Favorite Driver Scan on or off. When it set to on, favorite drivers could be scanned more frequently.
 - Replay: Operating with two soft keys and 4-Ways Key can set Replay function on or off. When it set to on, the last conversation scanner received could be recorded and played back.
- **Programming:** There are 6 items Over The Air, Keypad Entry, Write - Scanner, Read - Scanner, Race Series, and Reset Scanner for user to program his scanner.
 - a. Over The Air: The RE3000 features the latest in programming convenience; Over The Air. To automatically program the latest race changes, just walk within range of one of our Service/Sales trailers at the track to stay updated. This is the preferred and fastest method of updating the scanner with the latest track/driver frequencies, names, codes and channel numbers.
 - b. Keypad Entry: To enter track/driver frequencies, codes and driver names by manual.
 - c. Write - Scanner: To download/ track/driver frequencies, codes and driver names from PC or source scanner.
 - d. Read - Scanner: To upload/ track/driver frequencies, codes and driver names to PC or destination scanner.
 - e. Race Series: To edit banks name.
 - f. Reset Scanner: To delete all data and return to default setting.

Secondary Menu

There are two Secondary Menus, one inside **Series** and the other one inside **Scan List**. Secondary Menus are submenu associated with a primary Main Menu. They are displayed as a pop-up window on the display screen.

- a. Press the Right (MENU) Key while in stop scanning mode, display shows: **SCAN LIST, PROGRAM, FAVORITE & MANU** in the pop-up windows for user to select the desired option.
- b. When inside the **SCAN LIST**, press **MENU** Key to enter Secondary Pop-up Menu. Scanner shows **SELECT ALL, SELECT NONE & MANU** for user selection.